PETROBRAS	DATA SHEETS	No. I-DE-3010.2G-5330-712-DTG-301	
	CLIENT: E & P		SHEET 1 of 7
	JOB: BUZIOS FIELD AREA DEVELOPMENT		
	AREA: PETROBRAS 78 (P-78)		
SRGE	TITLE: PUMP/MOTOR PERFORMANCE CURVES - OILYWATER SEPARATOR PACKAGE		(I)
			SCP78

Keppel Shipyard / Hyundai Heavy Industries	QE554ALQ54		
	CONTRACTOR Nº DTG		
[File: MICROSOFT WORD/V.2003/I-AA-3010.2G-NNNN-NNN-KES-NNN_N]	TECH.RESP.:: -	CREA Nº: -	INITIALS: -

INDEX OF REVISIONS

REV.	DESCRIPTION AND/OR REVISED SHEETS
0	FOR DESIGN
A	APPROVED FOR DESIGN
B	APPROVED FOR CONSTRUCTION
C	CERTIFIED

	REV. 0	REV. A	REV. B	REV. C	REV. D	REV. E	REV. F	REV. G	REV. H
DATE	18/11/2021	02/12/2021	21/06/2022	15/03/2024					
DESIGN	DL	DL	AF	MS					
EXECUTION	DL	DL	DL	MS					
CHECK	MS	MS	DL	MS					
APPROVAL	-	-							

INFORMATION IN THIS DOCUMENT IS PROPERTY OF PETROBRAS, BEING PROHIBITED OUTSIDE OF THEIR PURPOSE

FORM OWNED TO PETROBRAS N-0381 REV. L

INDEX

1- PUMP -P1.....3

2- ELECTRIC MOTOR FOR M1 5

1- PUMP -P1

PCM Pump - 13c12s	
Type	**Progressive cavity pump**
Body	**Stainless steel 316L**
Rotor	**Stainless steel 420**
Stator	**NBR**
Connections	**PN40 DN50 Class 150 NPS 2"**
Capacity	**5 m3/h**
Máx Pressure*	**Limited to 3.8 bar (PS1)**

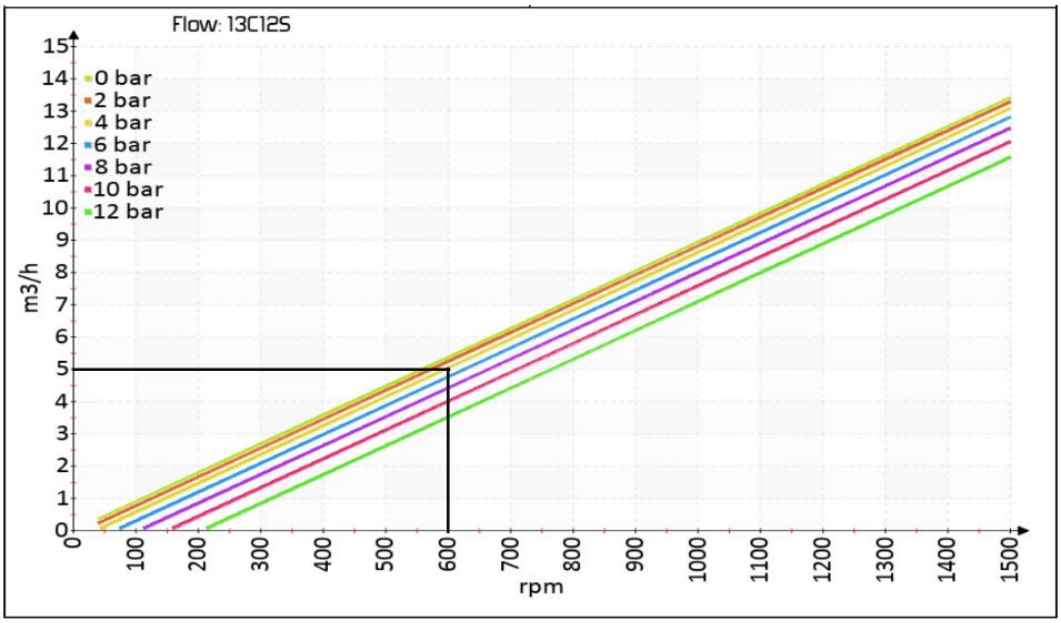
Flow: 13C12S
0 bar
2 bar
4 bar
6 bar
8 bar
10 bar
12 bar
m3/h
rpm

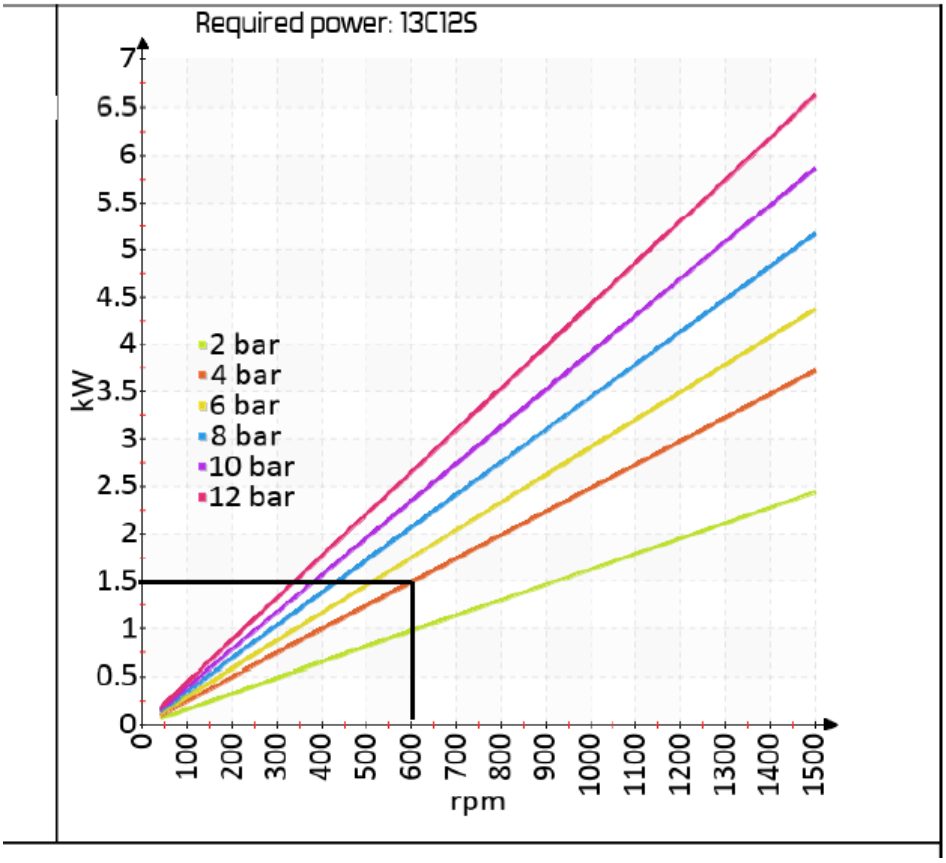
Required power: 13C12S
2 bar
4 bar
6 bar
8 bar
10 bar
12 bar
kW
rpm

2- ELECTRIC MOTOR FOR M1

Motor SK372.1F-100AP/4	
Tension	**440v 60Hz 3Ph**
IP	**66**
Insulation class	**F**
Speed	**600 rpm.**
Power	**3 Kw.**

440V stamping requested - Max ambient temperature 45°C

Product Name	Helical Inline Gears NORDBLOC.1
Input Speed	1765 tr/min
Motor Series	APAB
Motor Inverter Speed Range	Standard Line Powered - Inverter Capable
Ratio	2.86
Output Speed	616 tr/min
Service Factor	1.9
Output torque	46.5 Nm
Overhung load	2.6 kN
Axial Load	7.1 kN
Power	3 kW
Voltage	265/460 V
Frequency	60 Hz
Efficiency Class	IE3
Current 1	8.82 A
Current 2	5.09 A
Motor Duty	S1 - Continuous
Enclosure	IP66
Insulation	F
Mounting Pos	M1
Housing Material	Aluminum Housing
Type of housing	Foot Mount
Output Shaft	Solid Keyed Shaft
Output Shaft Dia	25X50 mm
Output Shaft Material	Standard
Gearbox Breather Options	Autovent
Gearbox Sealing Options	Standard
Bearing Design	Standard Bearings
Motor Cooling	TEFC - Totally Enclosed Fan Cooled
Terminal Box Pos	2
Conduit Entry Loc	I
Cable Glands	None
Nameplate Additional Marking	Standard Nameplate Marking

Torque and Current over Speed curves

100 AP/4 TF

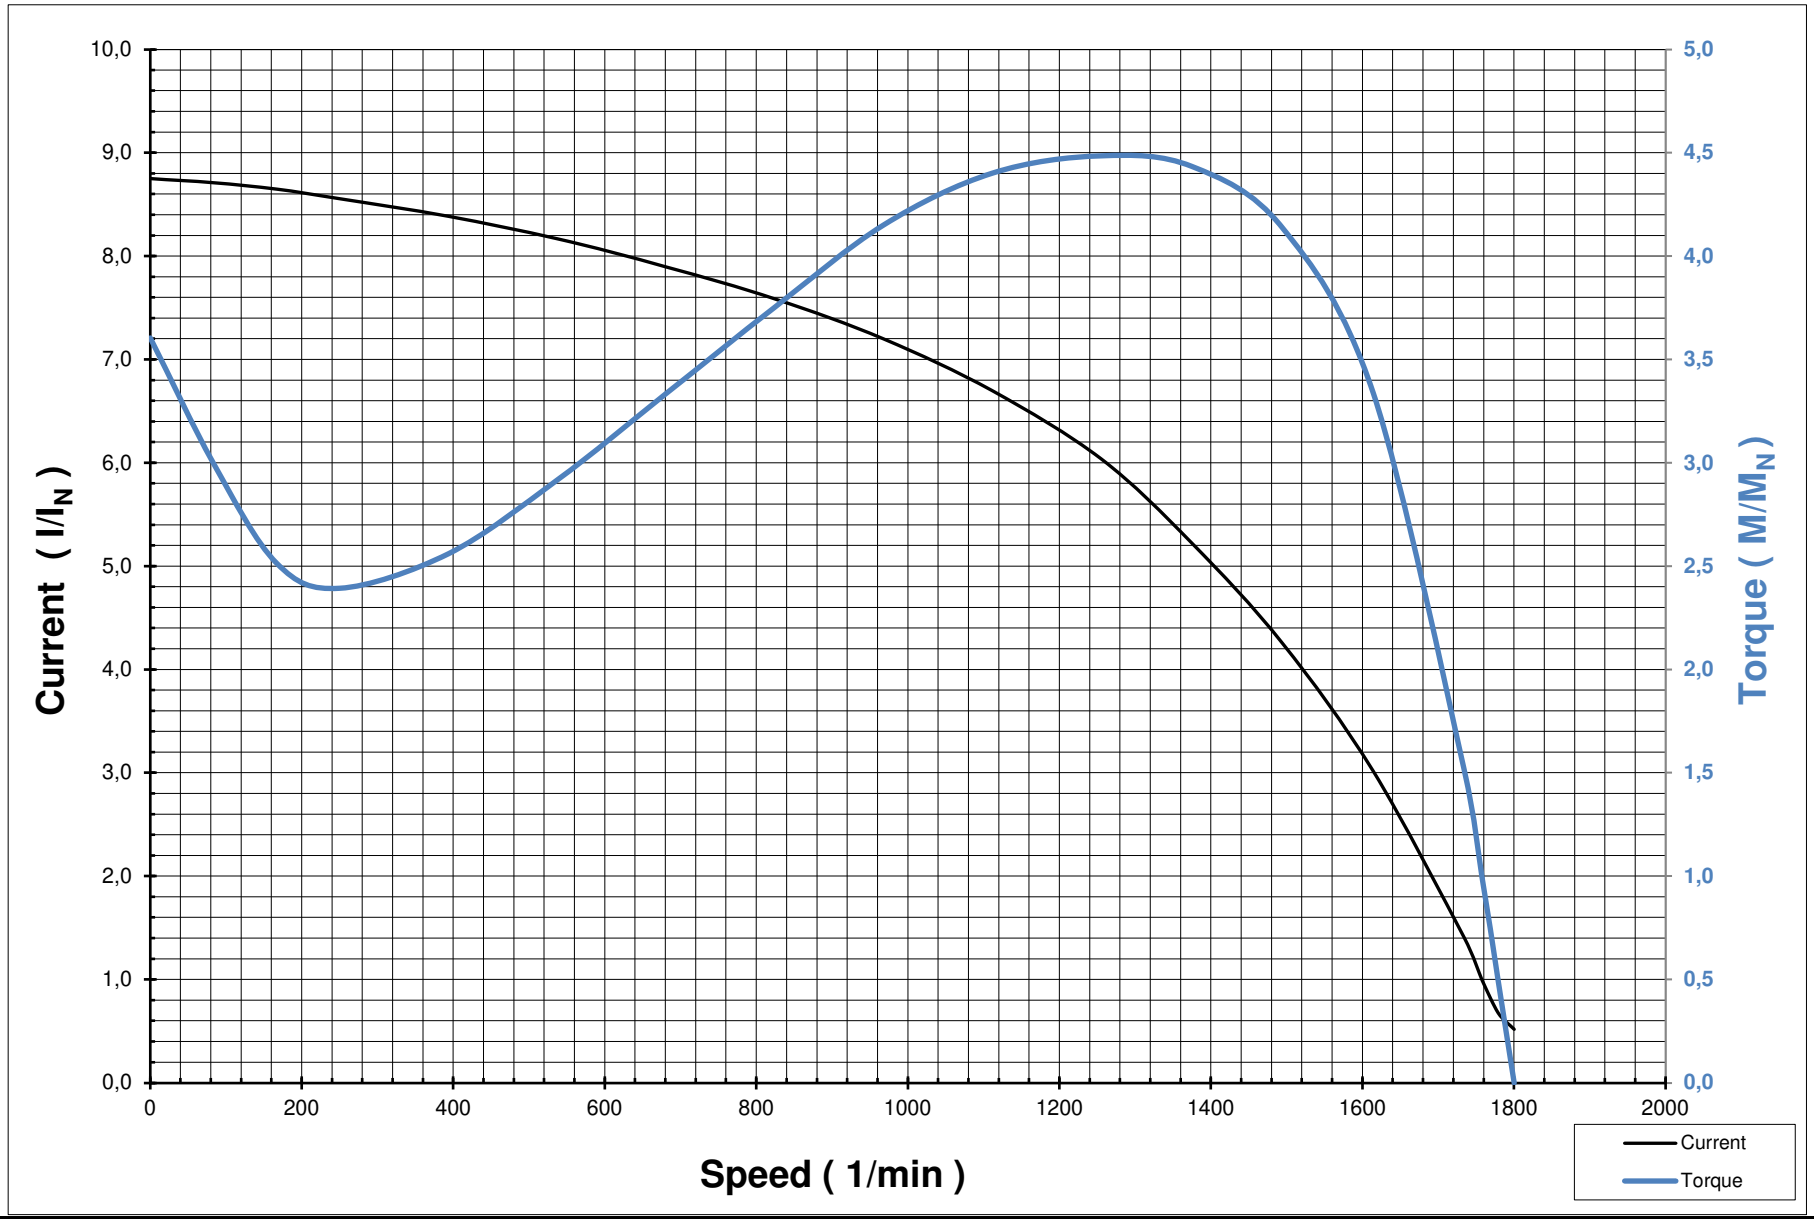

Stator:
15842007

Voltage (V):
460

Frequency (Hz):
60

Power (kW):
3

Load current (A):
5,43

Starting current (A):
47,5

No load current (A):
2,79

Starting torque (Nm):
58,7

Minimum torque (Nm):
39,0

Breakdown torque (Nm):
73,0

Load torque (Nm):
16,3

Connection:
Y

26.08.2021