Electrical & Instrument Scope of Work for Package Equipment

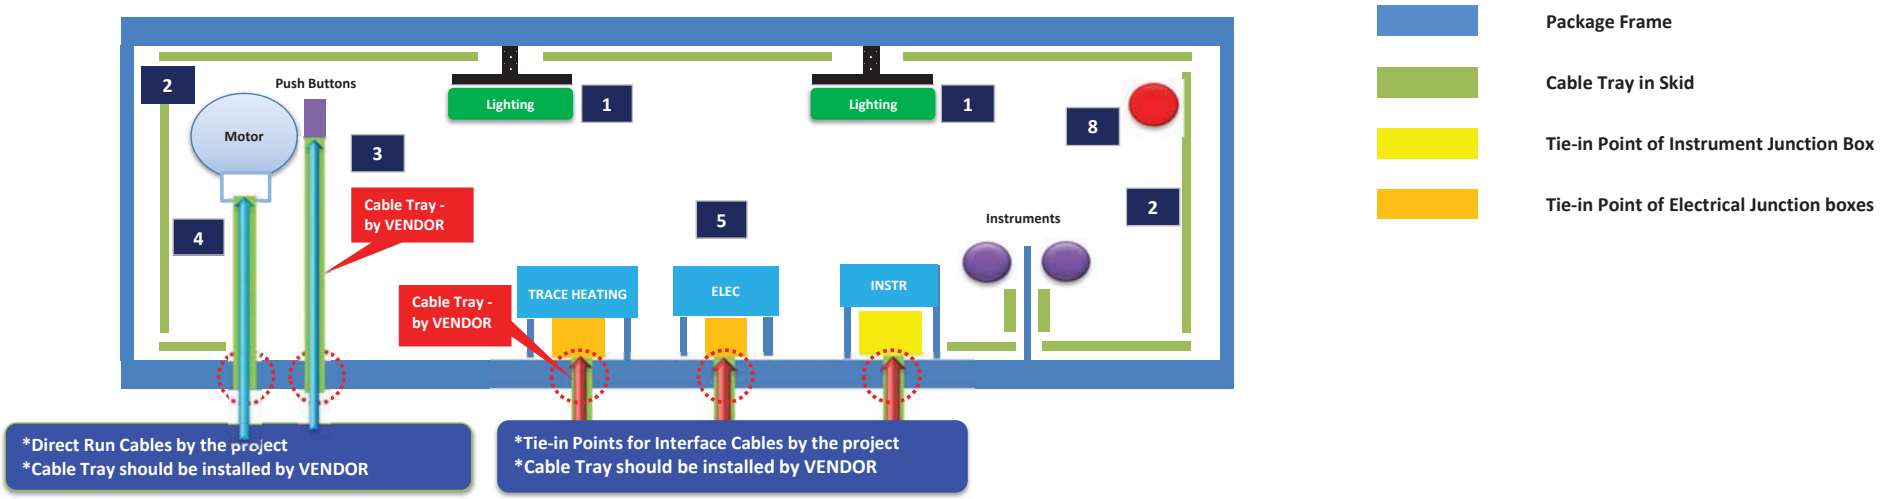

DESCRIPTION

1. **Lighting** : Lighting fixture and their supports shall be fitted and provided by VENDOR ; all supports and parts thereof should be secured per recommended preservation properly by VENDOR.
2. **Cable Tray** : Cable Tray should be provided, fitted and routed within the package/equipment by VENDOR.
3. **Push Button Stations** : Push Buttons and their cable tray within the package/equipment shall be provided by VENDOR. Push Button Manufacturer and their Model Number should be advised by the project.
4. **Motors** : Cable Tray to route the cable to the motor terminal box shall be provided by VENDOR within the package/equipment.
5. **Junction Box or LCP** : VENDOR shall provide junction box as per AVL(Approved Vendor List) for Instrument, Electrical(including Lighting & Small Power), and Trace Heating Cabling.
6. **Earthing and Bonding** : Earthing and bonding shall be provided according to the project documents. (by VENDOR)
7. **Cable Gland, Gland Plate and their drilled hole** for above Items 1,3,4 and 5 on the skid and/or equipment shall be provided by VENDOR. The Size of Cable Gland and Drilling Hole on the gland plate for Tie-In Points from the field will be informed by the project through vendor data review.
8. **Detectors** : F&G detectors and/or other detectors with their supports shall be fitted and provided by VENDOR ; all supports and parts thereof should be secured per recommended preservation properly by VENDOR.

DESIGN NOTE

*VENDOR shall provide the cable tray to EOF(Edge of Skid Frame) and/or TOF(Top of Skid Frame) to cable entry as BASE SCOPE. Cable Entry Location (Tie-In) should be decided during vendor data review.
*All cables within the package/equipment shall be provided by VENDOR.
*Brackets or Supports for Cable Tray Mounting shall be installed by VENDOR.
*In case control panel which will be installed indoor building as ship loose, gland plate shall be provided with physical drilling by Vendor. The drilling hole plan shall be subject to the project review and approval. Cable gland and physical drilling on the given gland plate will be provided by Vendor.